



600x
600mm
**DOUBLE
CHARGE**
VITRIFIED TILES

**DEFINITION OF
A LUXURY**



600x600

DOUBLE CHARGE
VITRIFIED TILES



ULTRA WHITE



600x600

DOUBLE CHARGE
VITRIFIED TILES



ULTRA CREMA WHITE



600x600

DOUBLE CHARGE
VITRIFIED TILES



ULTRA GREEN



600x600

DOUBLE CHARGE
VITRIFIED TILES




ULTRA GOLD



600x600

DOUBLE CHARGE
VITRIFIED TILES

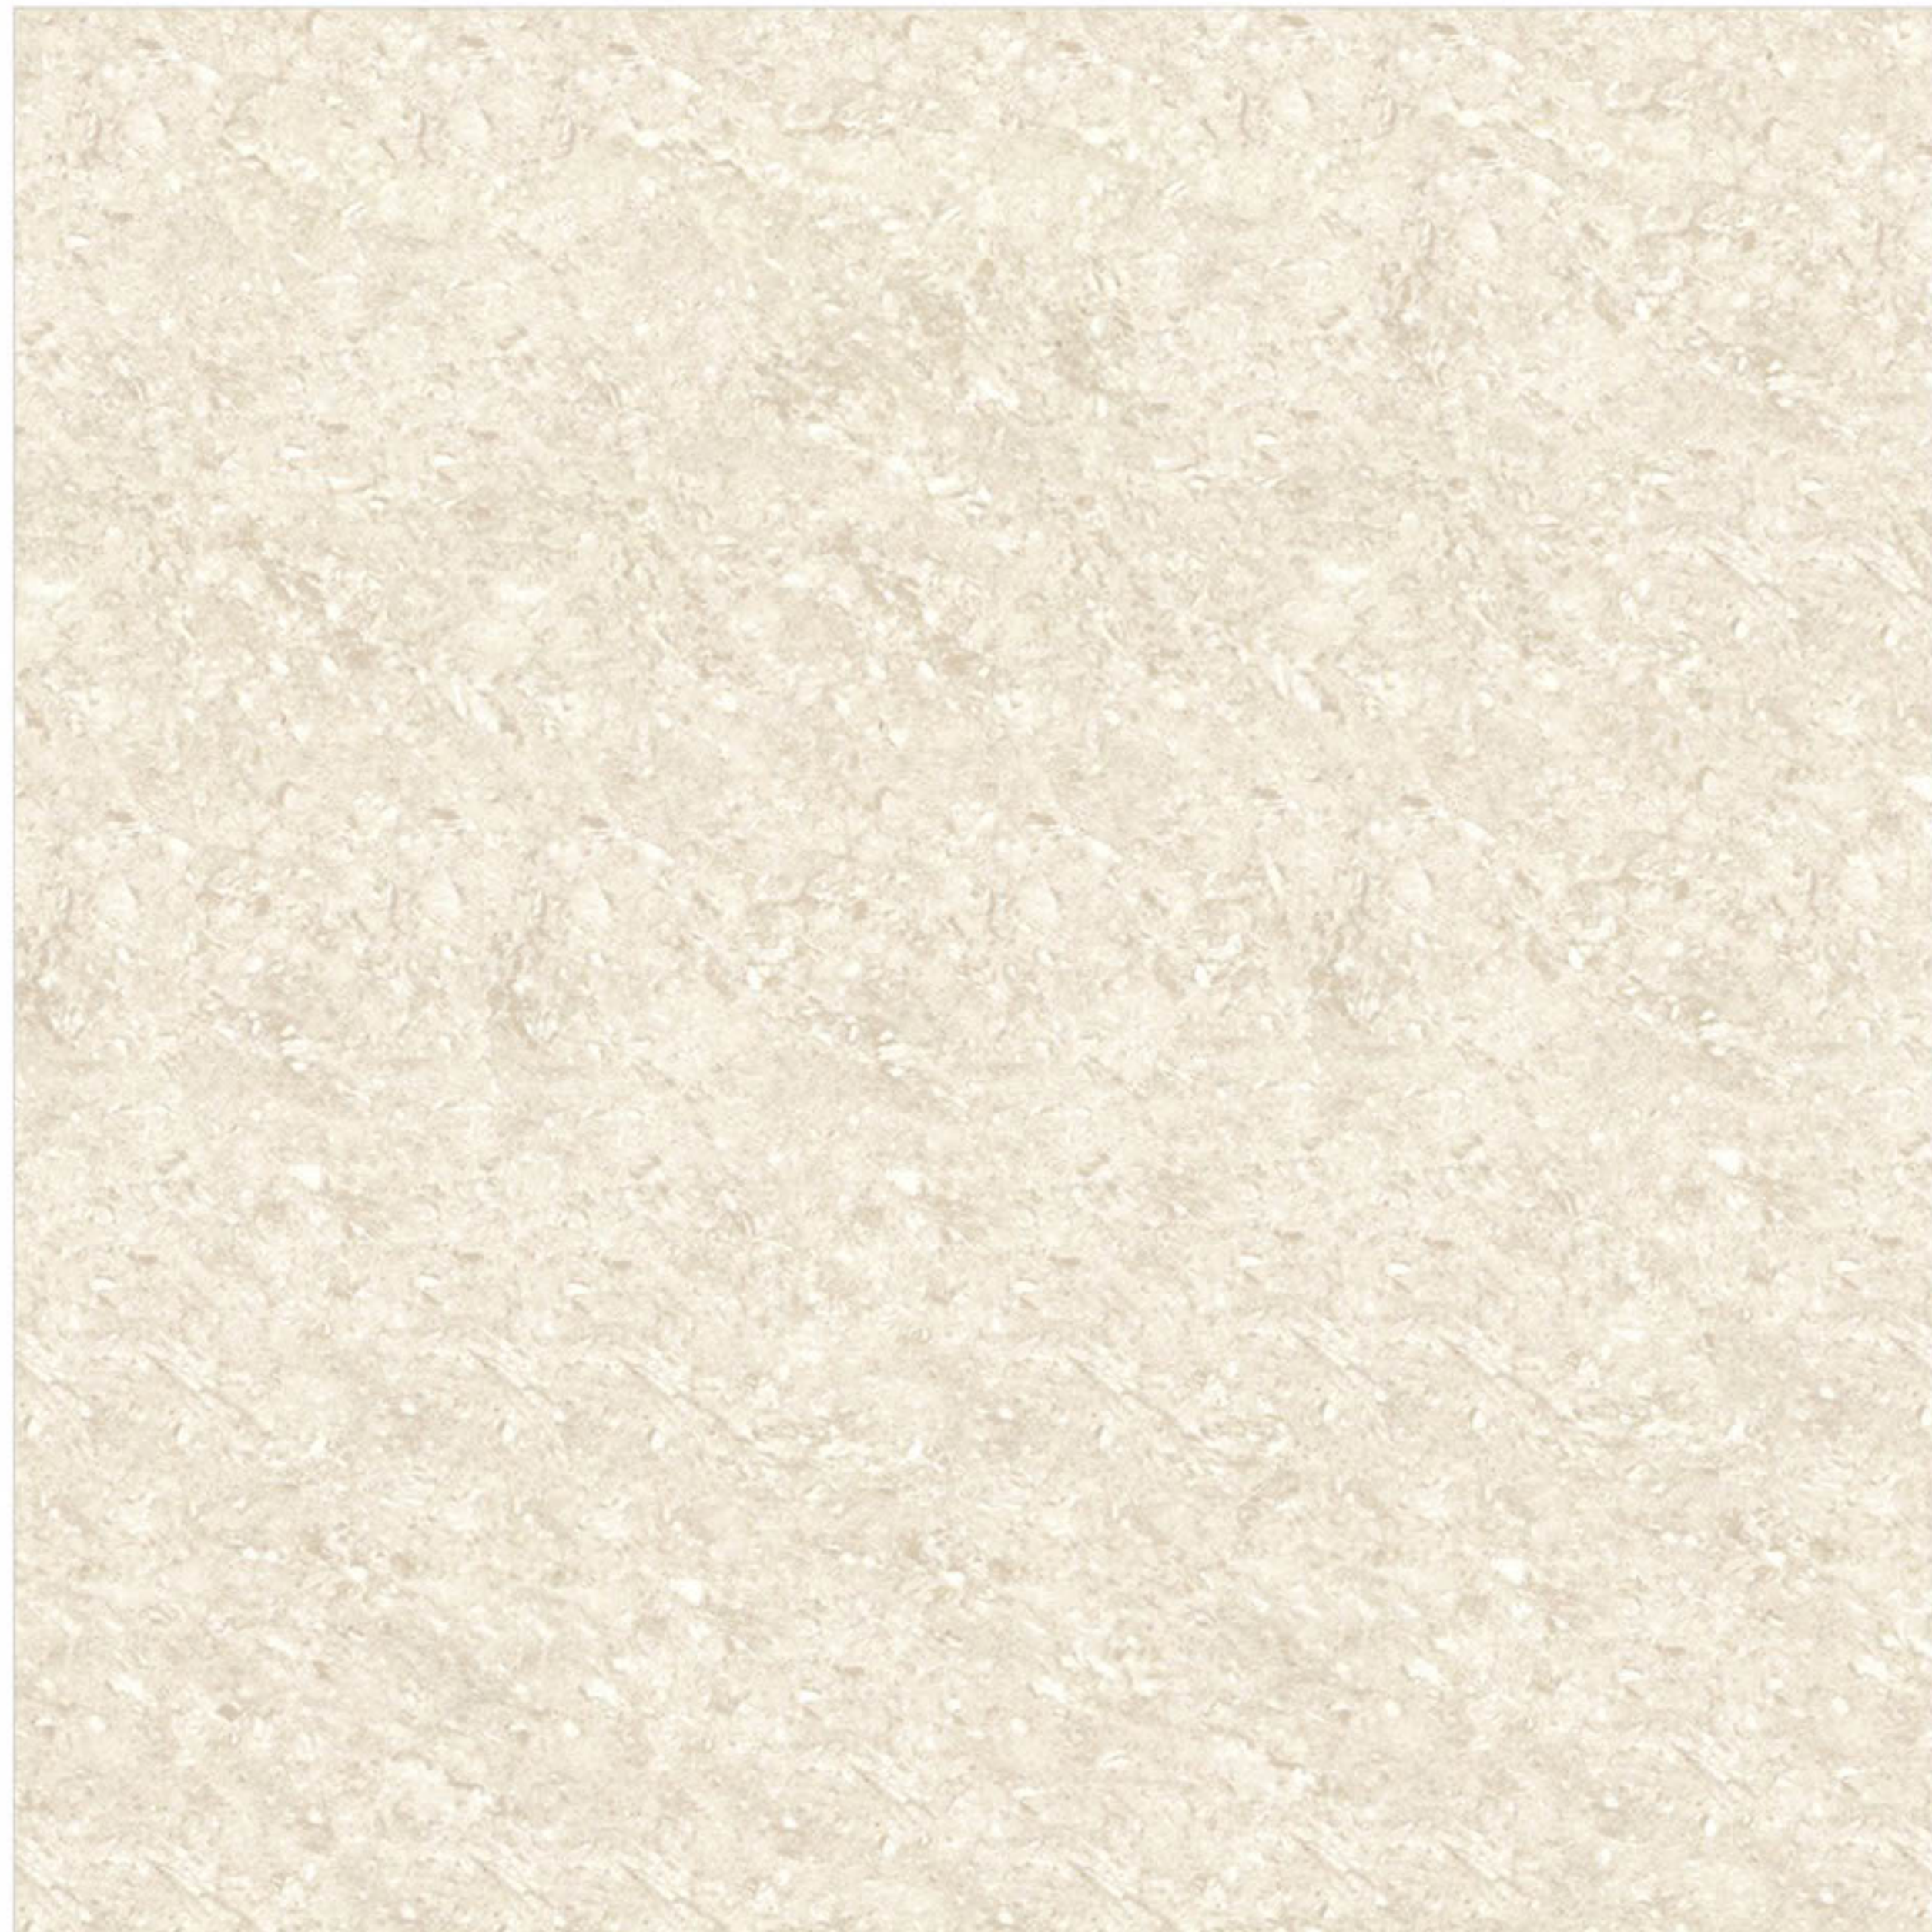

ULTRA BEIGE



600x600

DOUBLE CHARGE
VITRIFIED TILES



ULTRA PISTA



600x600

DOUBLE CHARGE
VITRIFIED TILES



ULTRA PINK



600x600

DOUBLE CHARGE
VITRIFIED TILES




AQUA ASH



600x600

DOUBLE CHARGE
VITRIFIED TILES

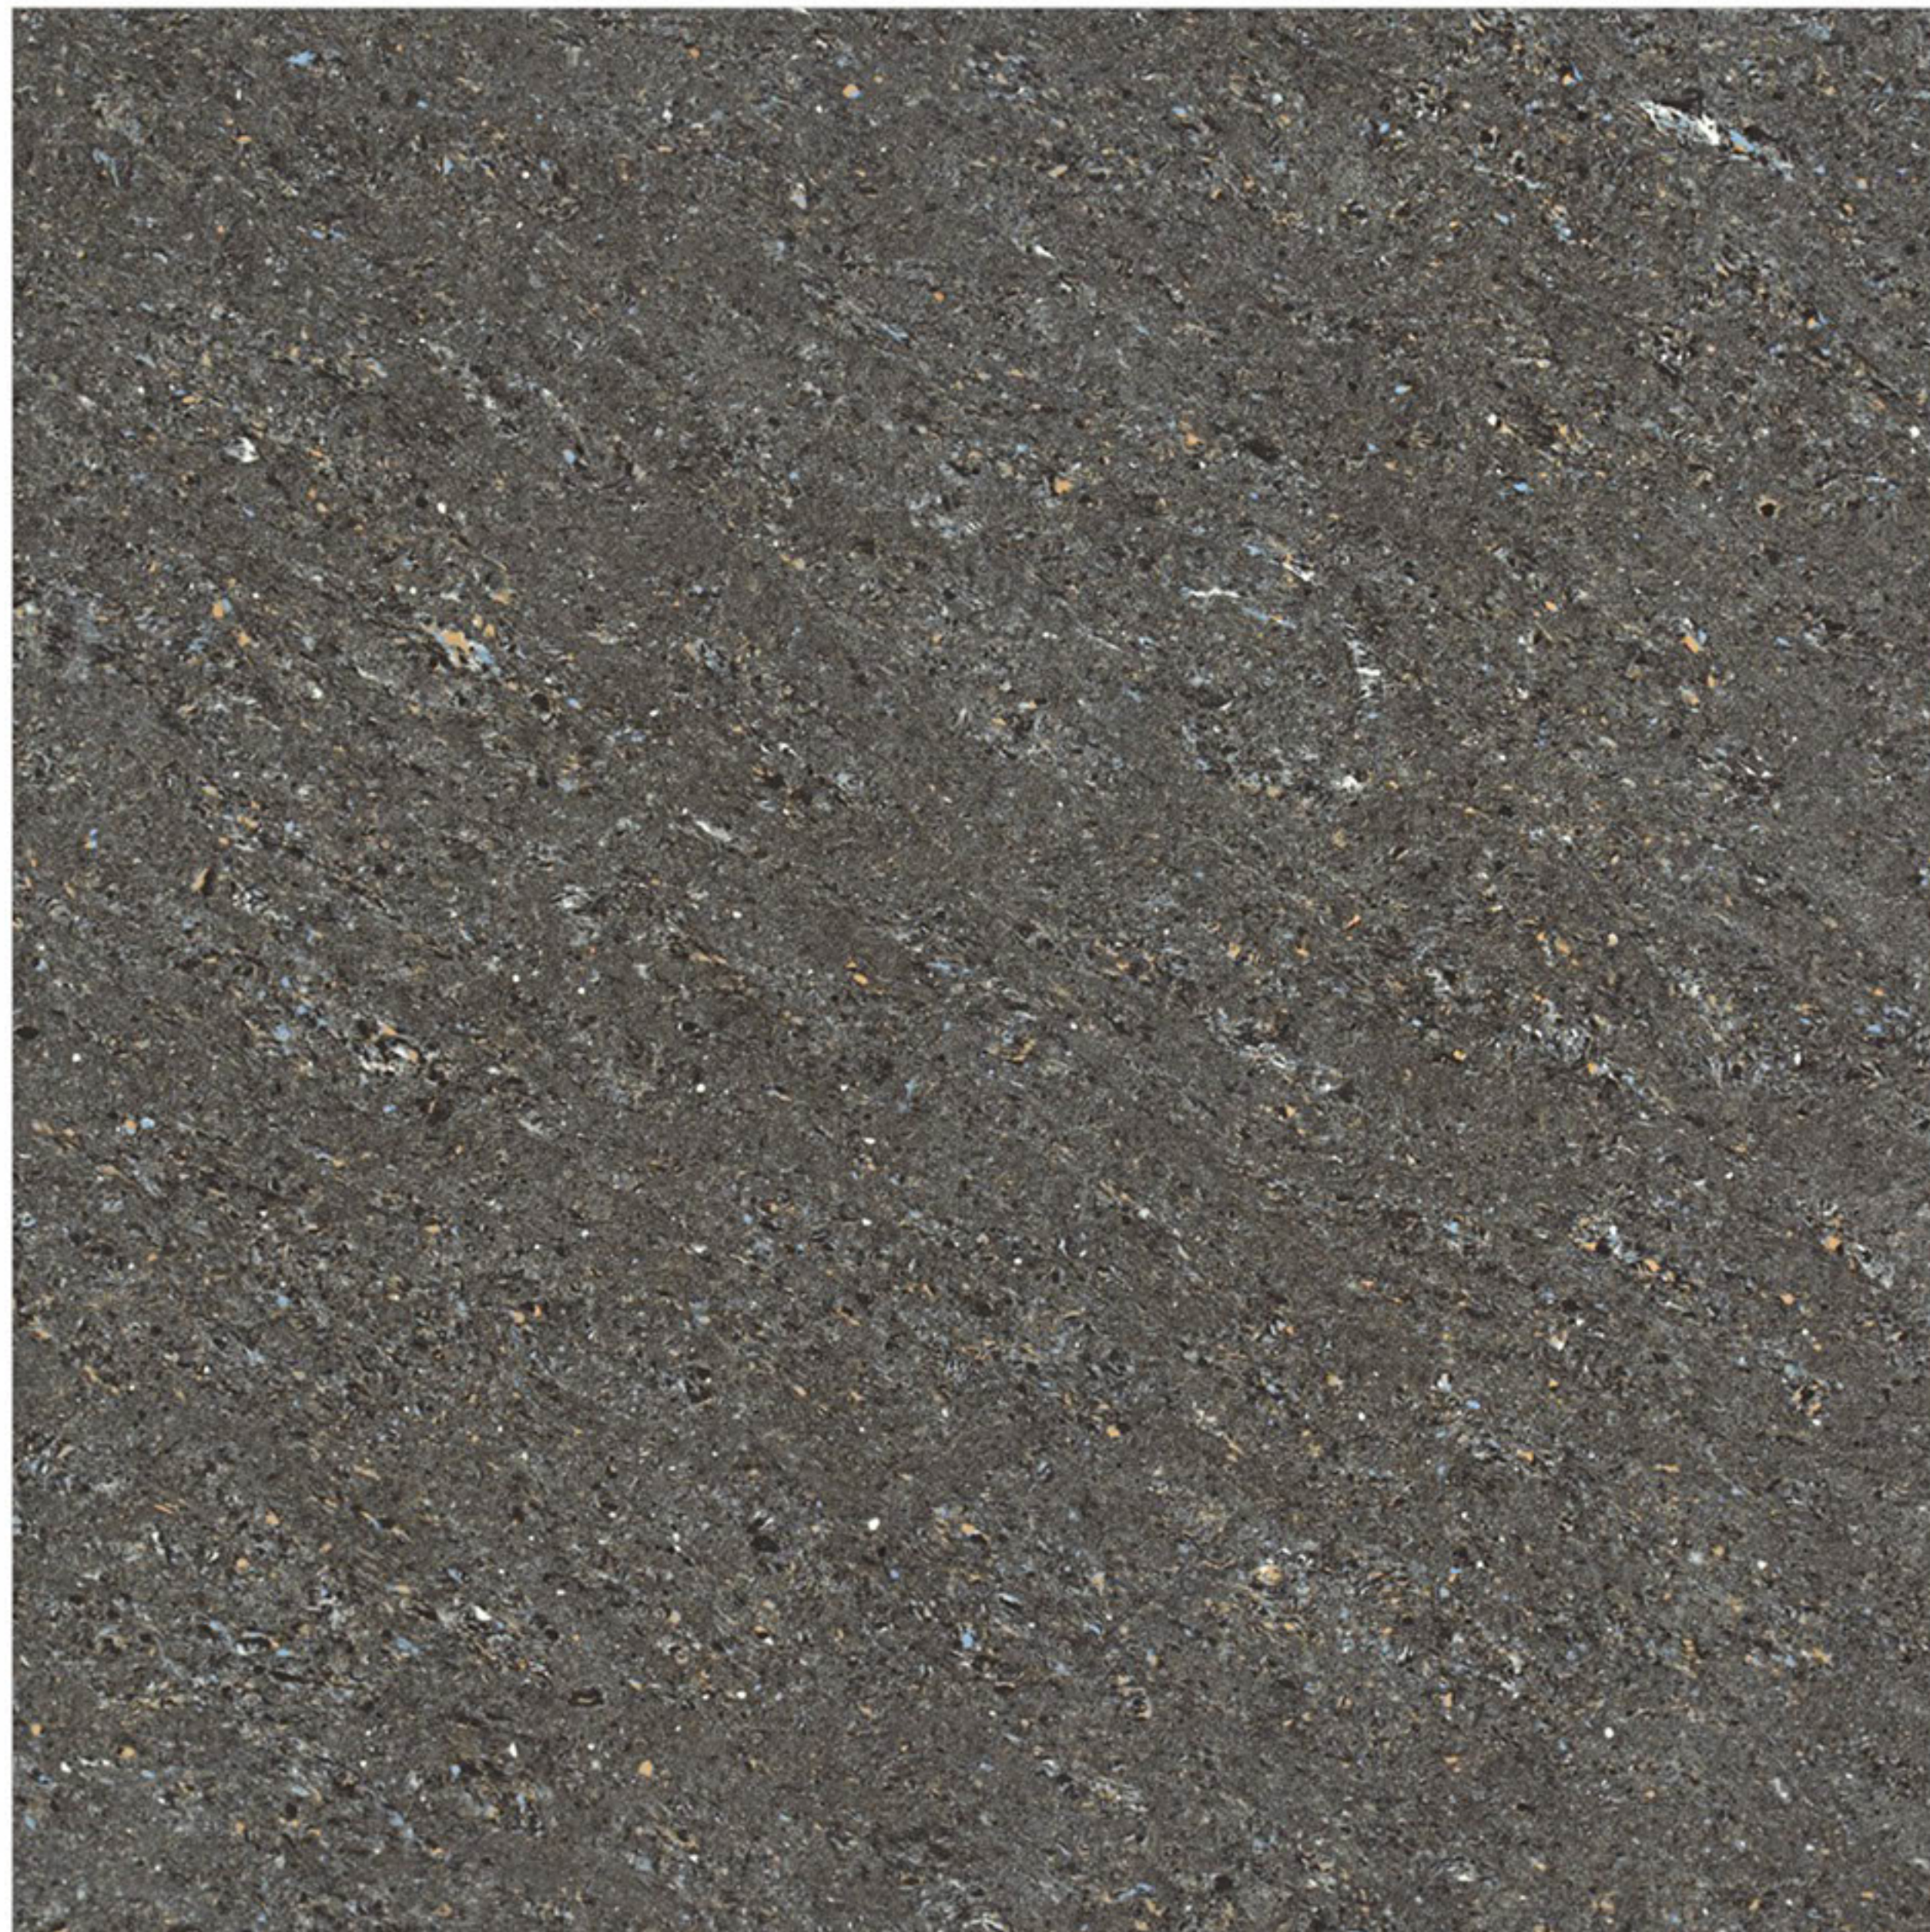


AQUA GREY



600x600

DOUBLE CHARGE
VITRIFIED TILES

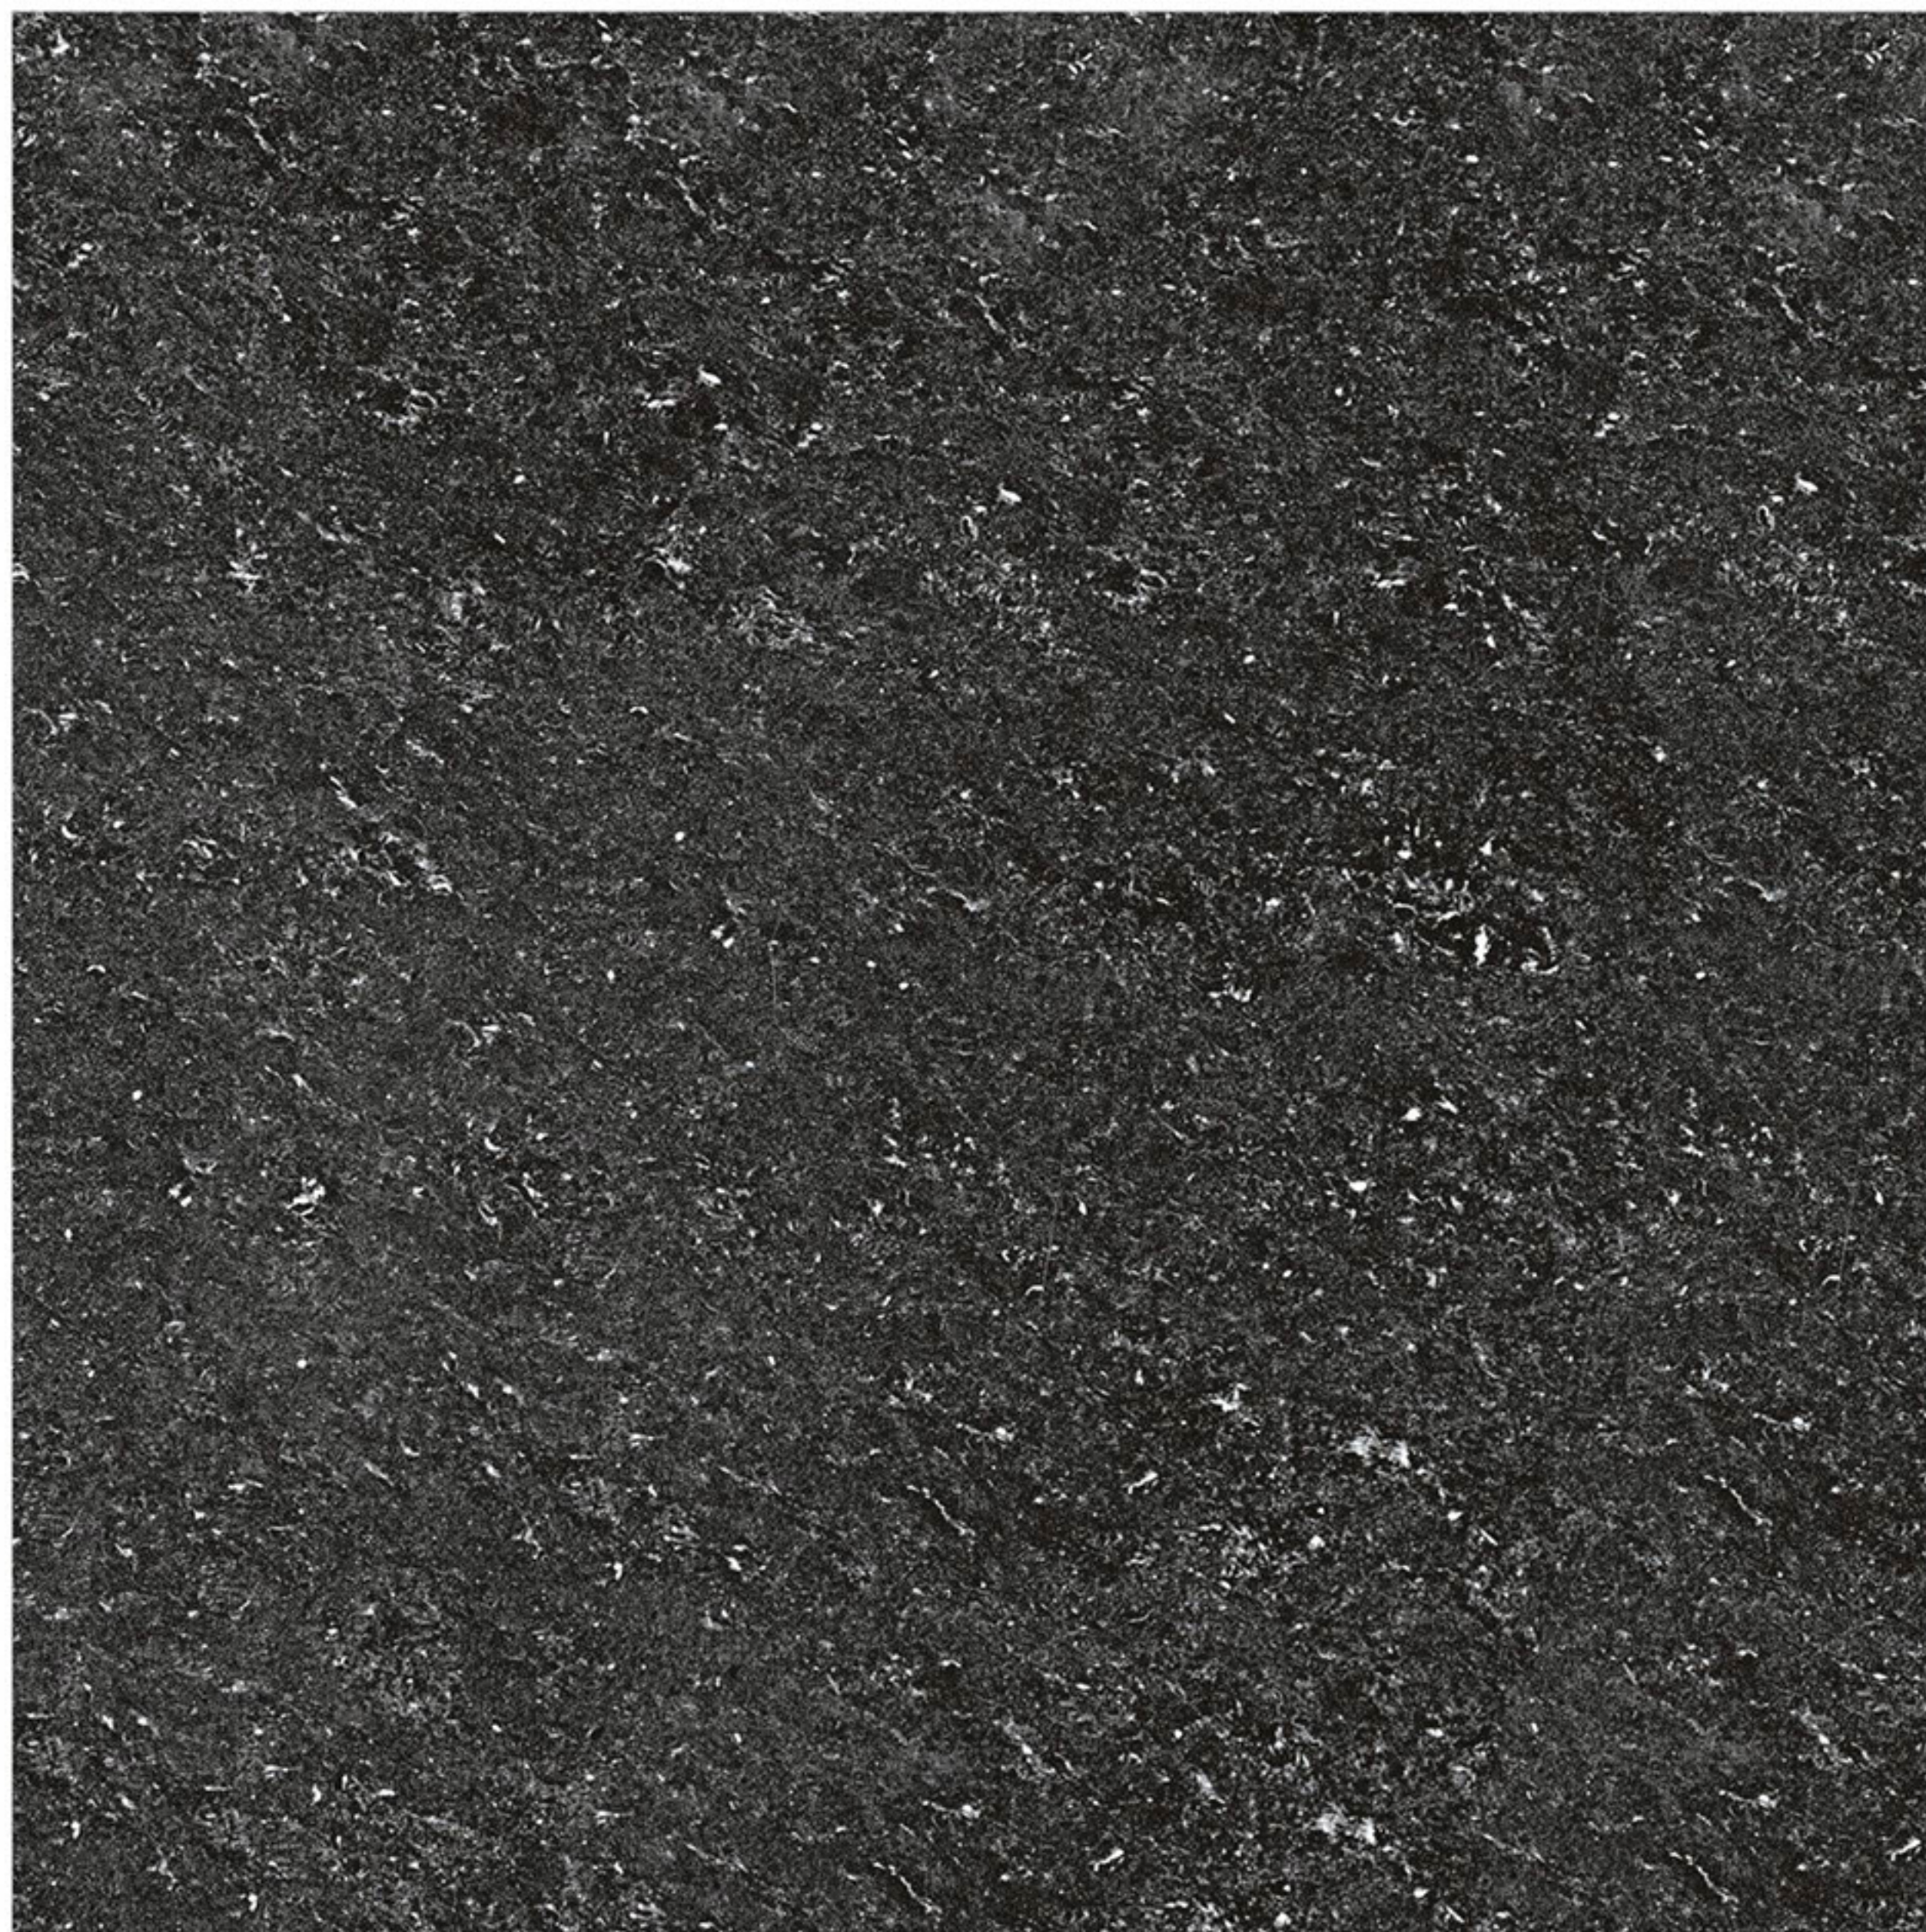

AQUA BLACK



600x600

DOUBLE CHARGE
VITRIFIED TILES



AQUA ALMOND



600x600

DOUBLE CHARGE
VITRIFIED TILES



AQUA CHOCO



600x600

DOUBLE CHARGE
VITRIFIED TILES



AQUA LAVA



600x600

DOUBLE CHARGE
VITRIFIED TILES




AQUA RED



600x600

DOUBLE CHARGE
VITRIFIED TILES

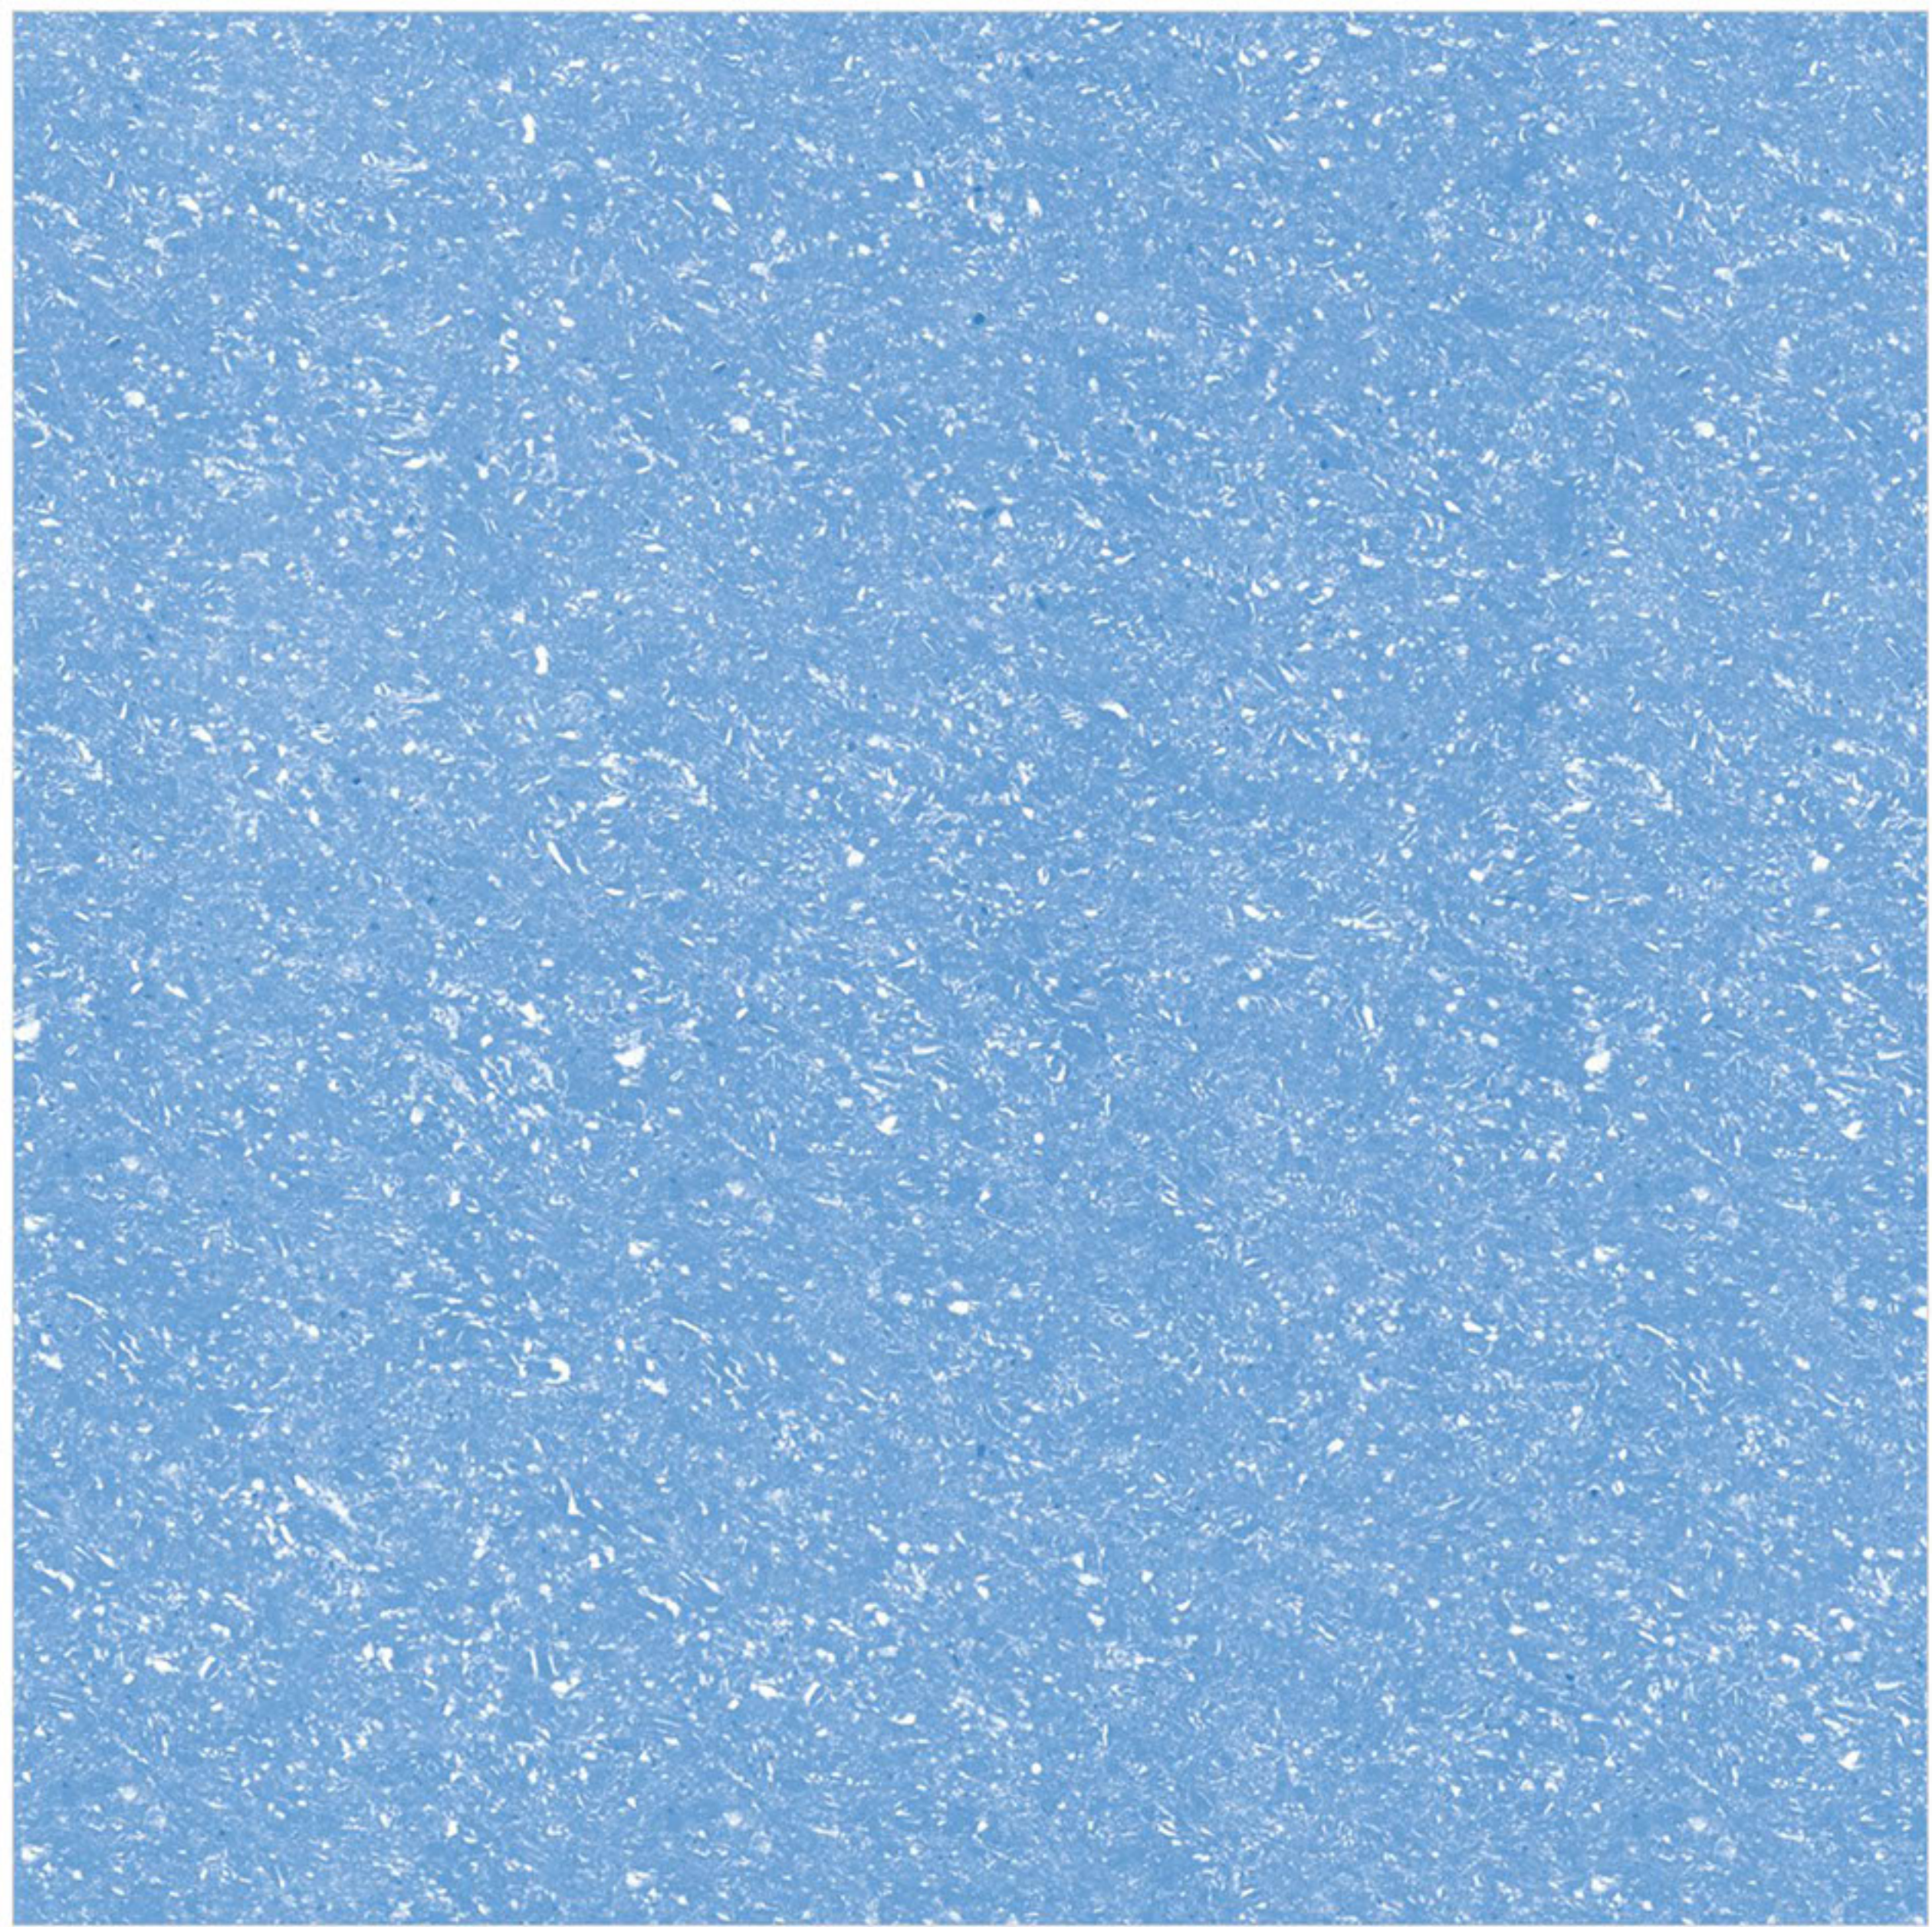


AQUA BLUE



600x600

DOUBLE CHARGE
VITRIFIED TILES

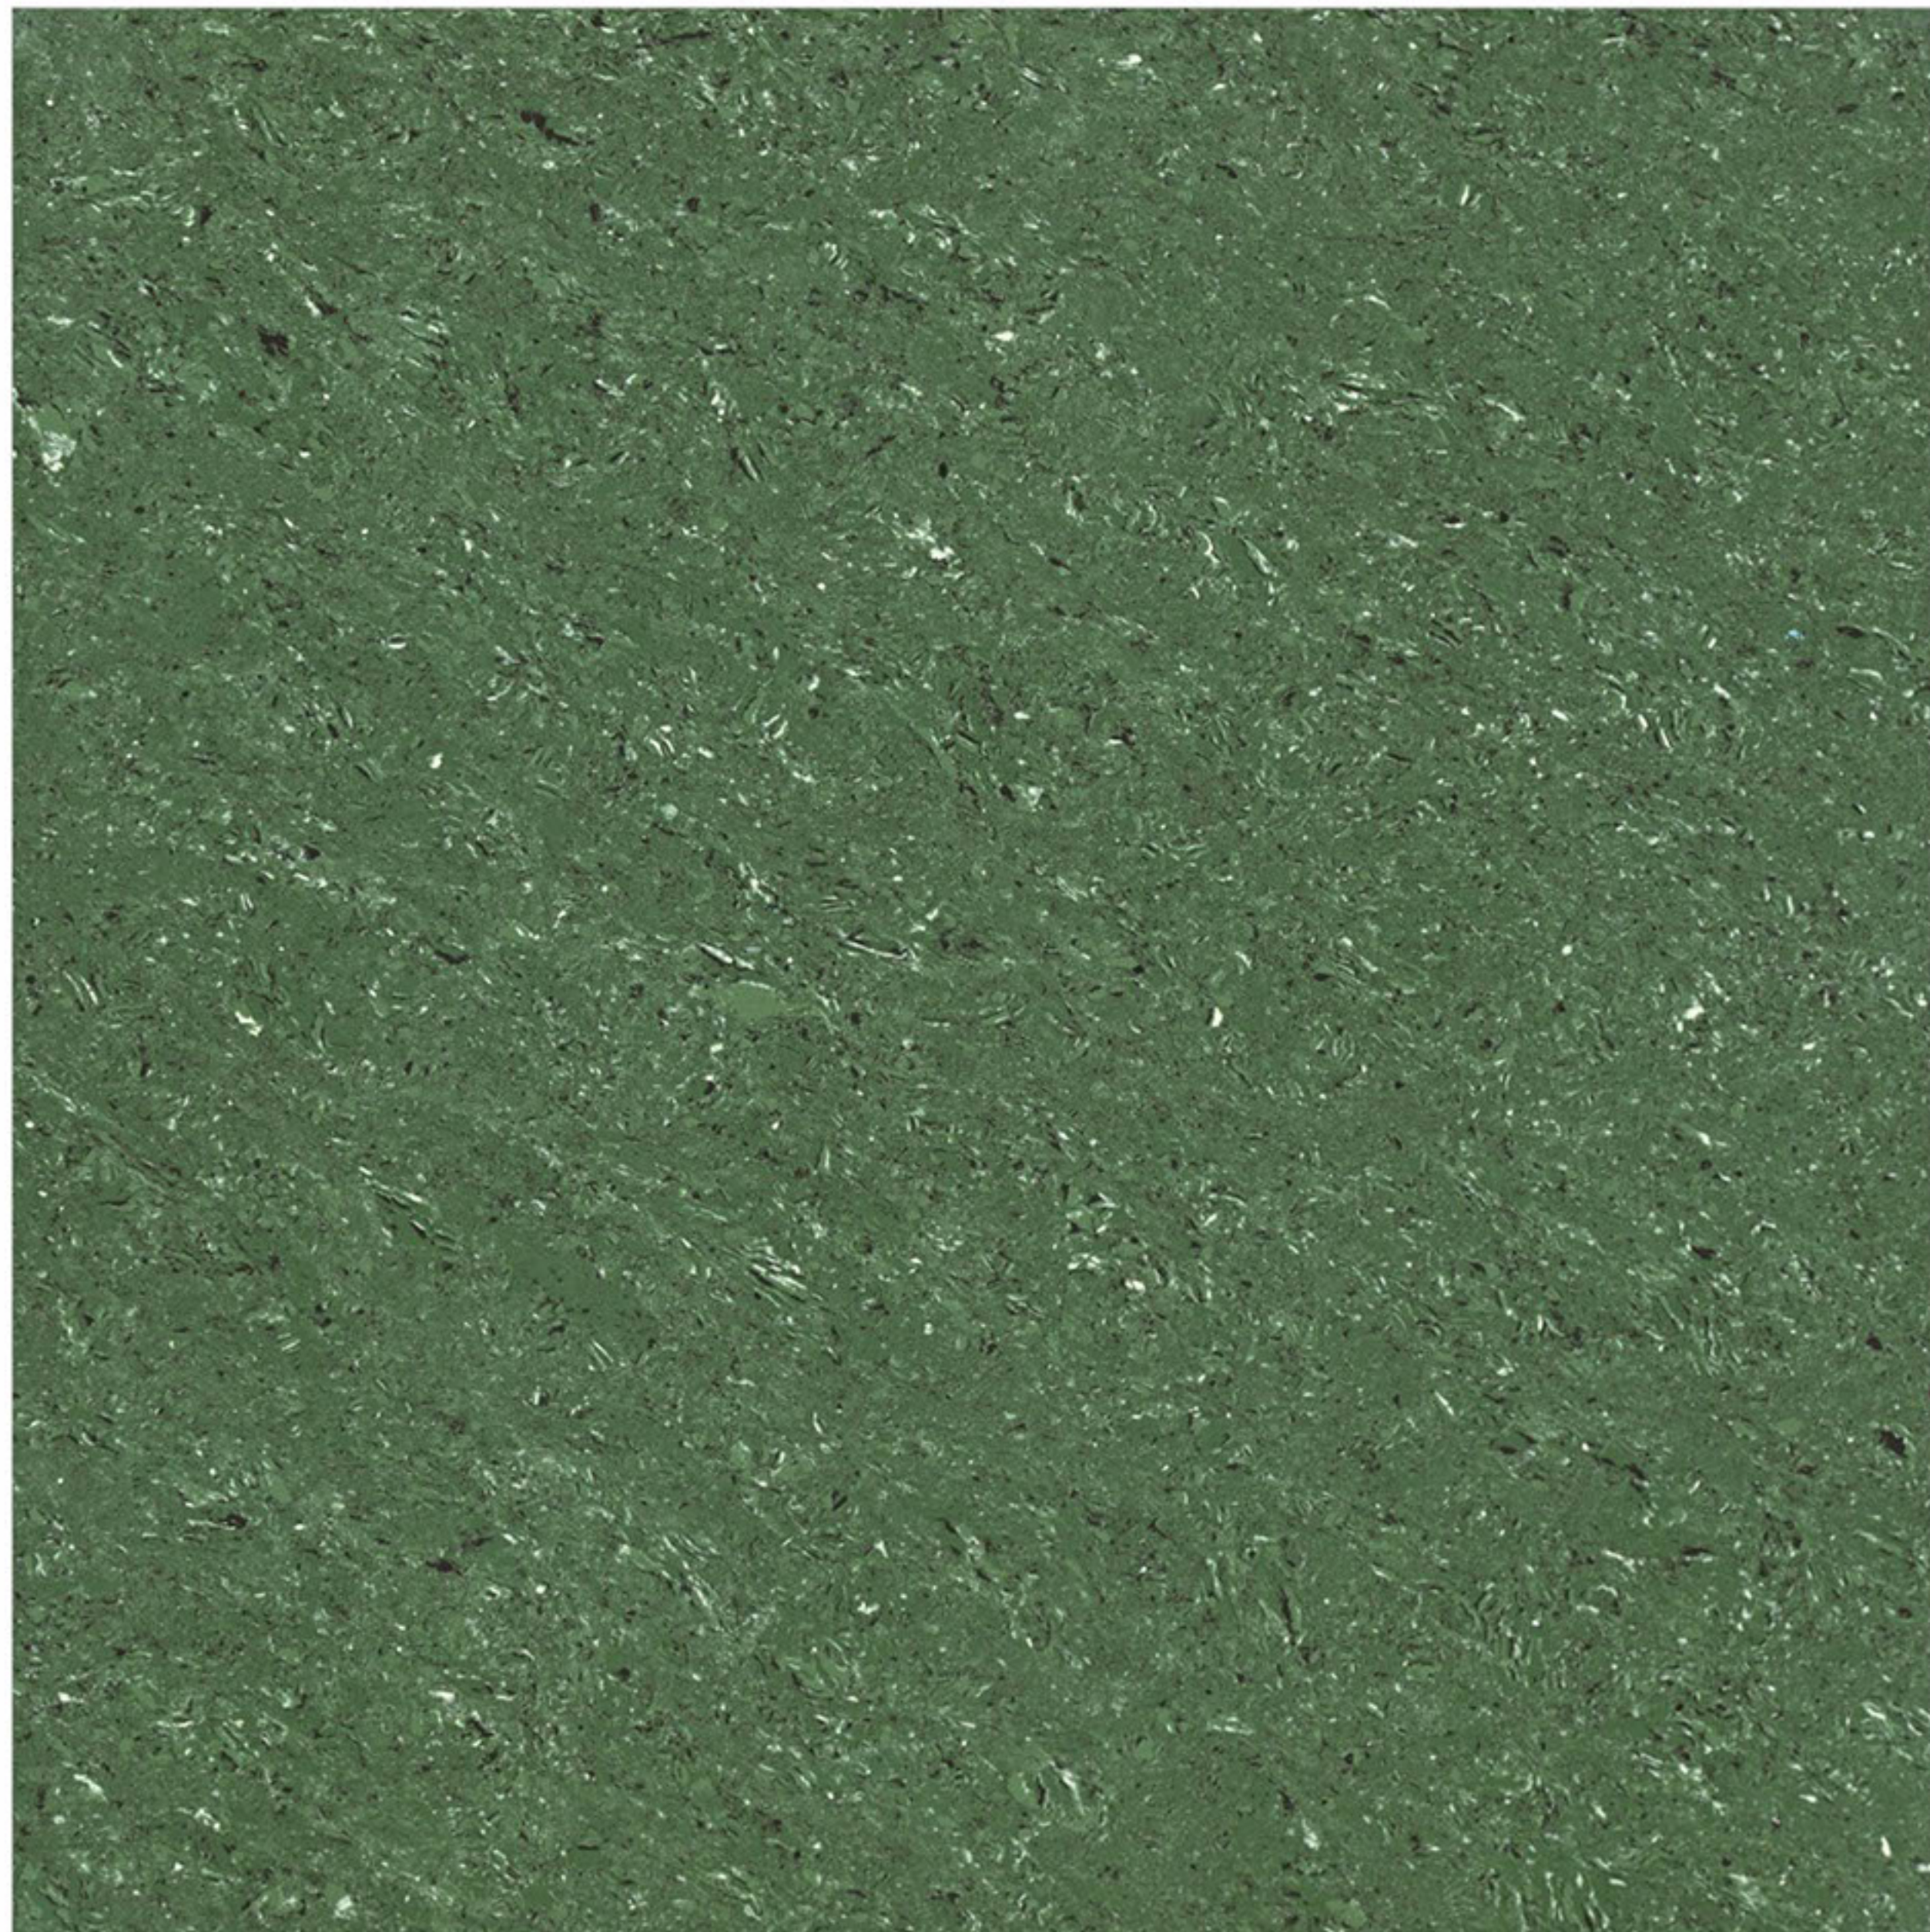

AQUA GREEN



600x600

DOUBLE CHARGE
VITRIFIED TILES



AQUA BROWN



600x600

DOUBLE CHARGE
VITRIFIED TILES




AQUA BRONZE



600x600

DOUBLE CHARGE
VITRIFIED TILES

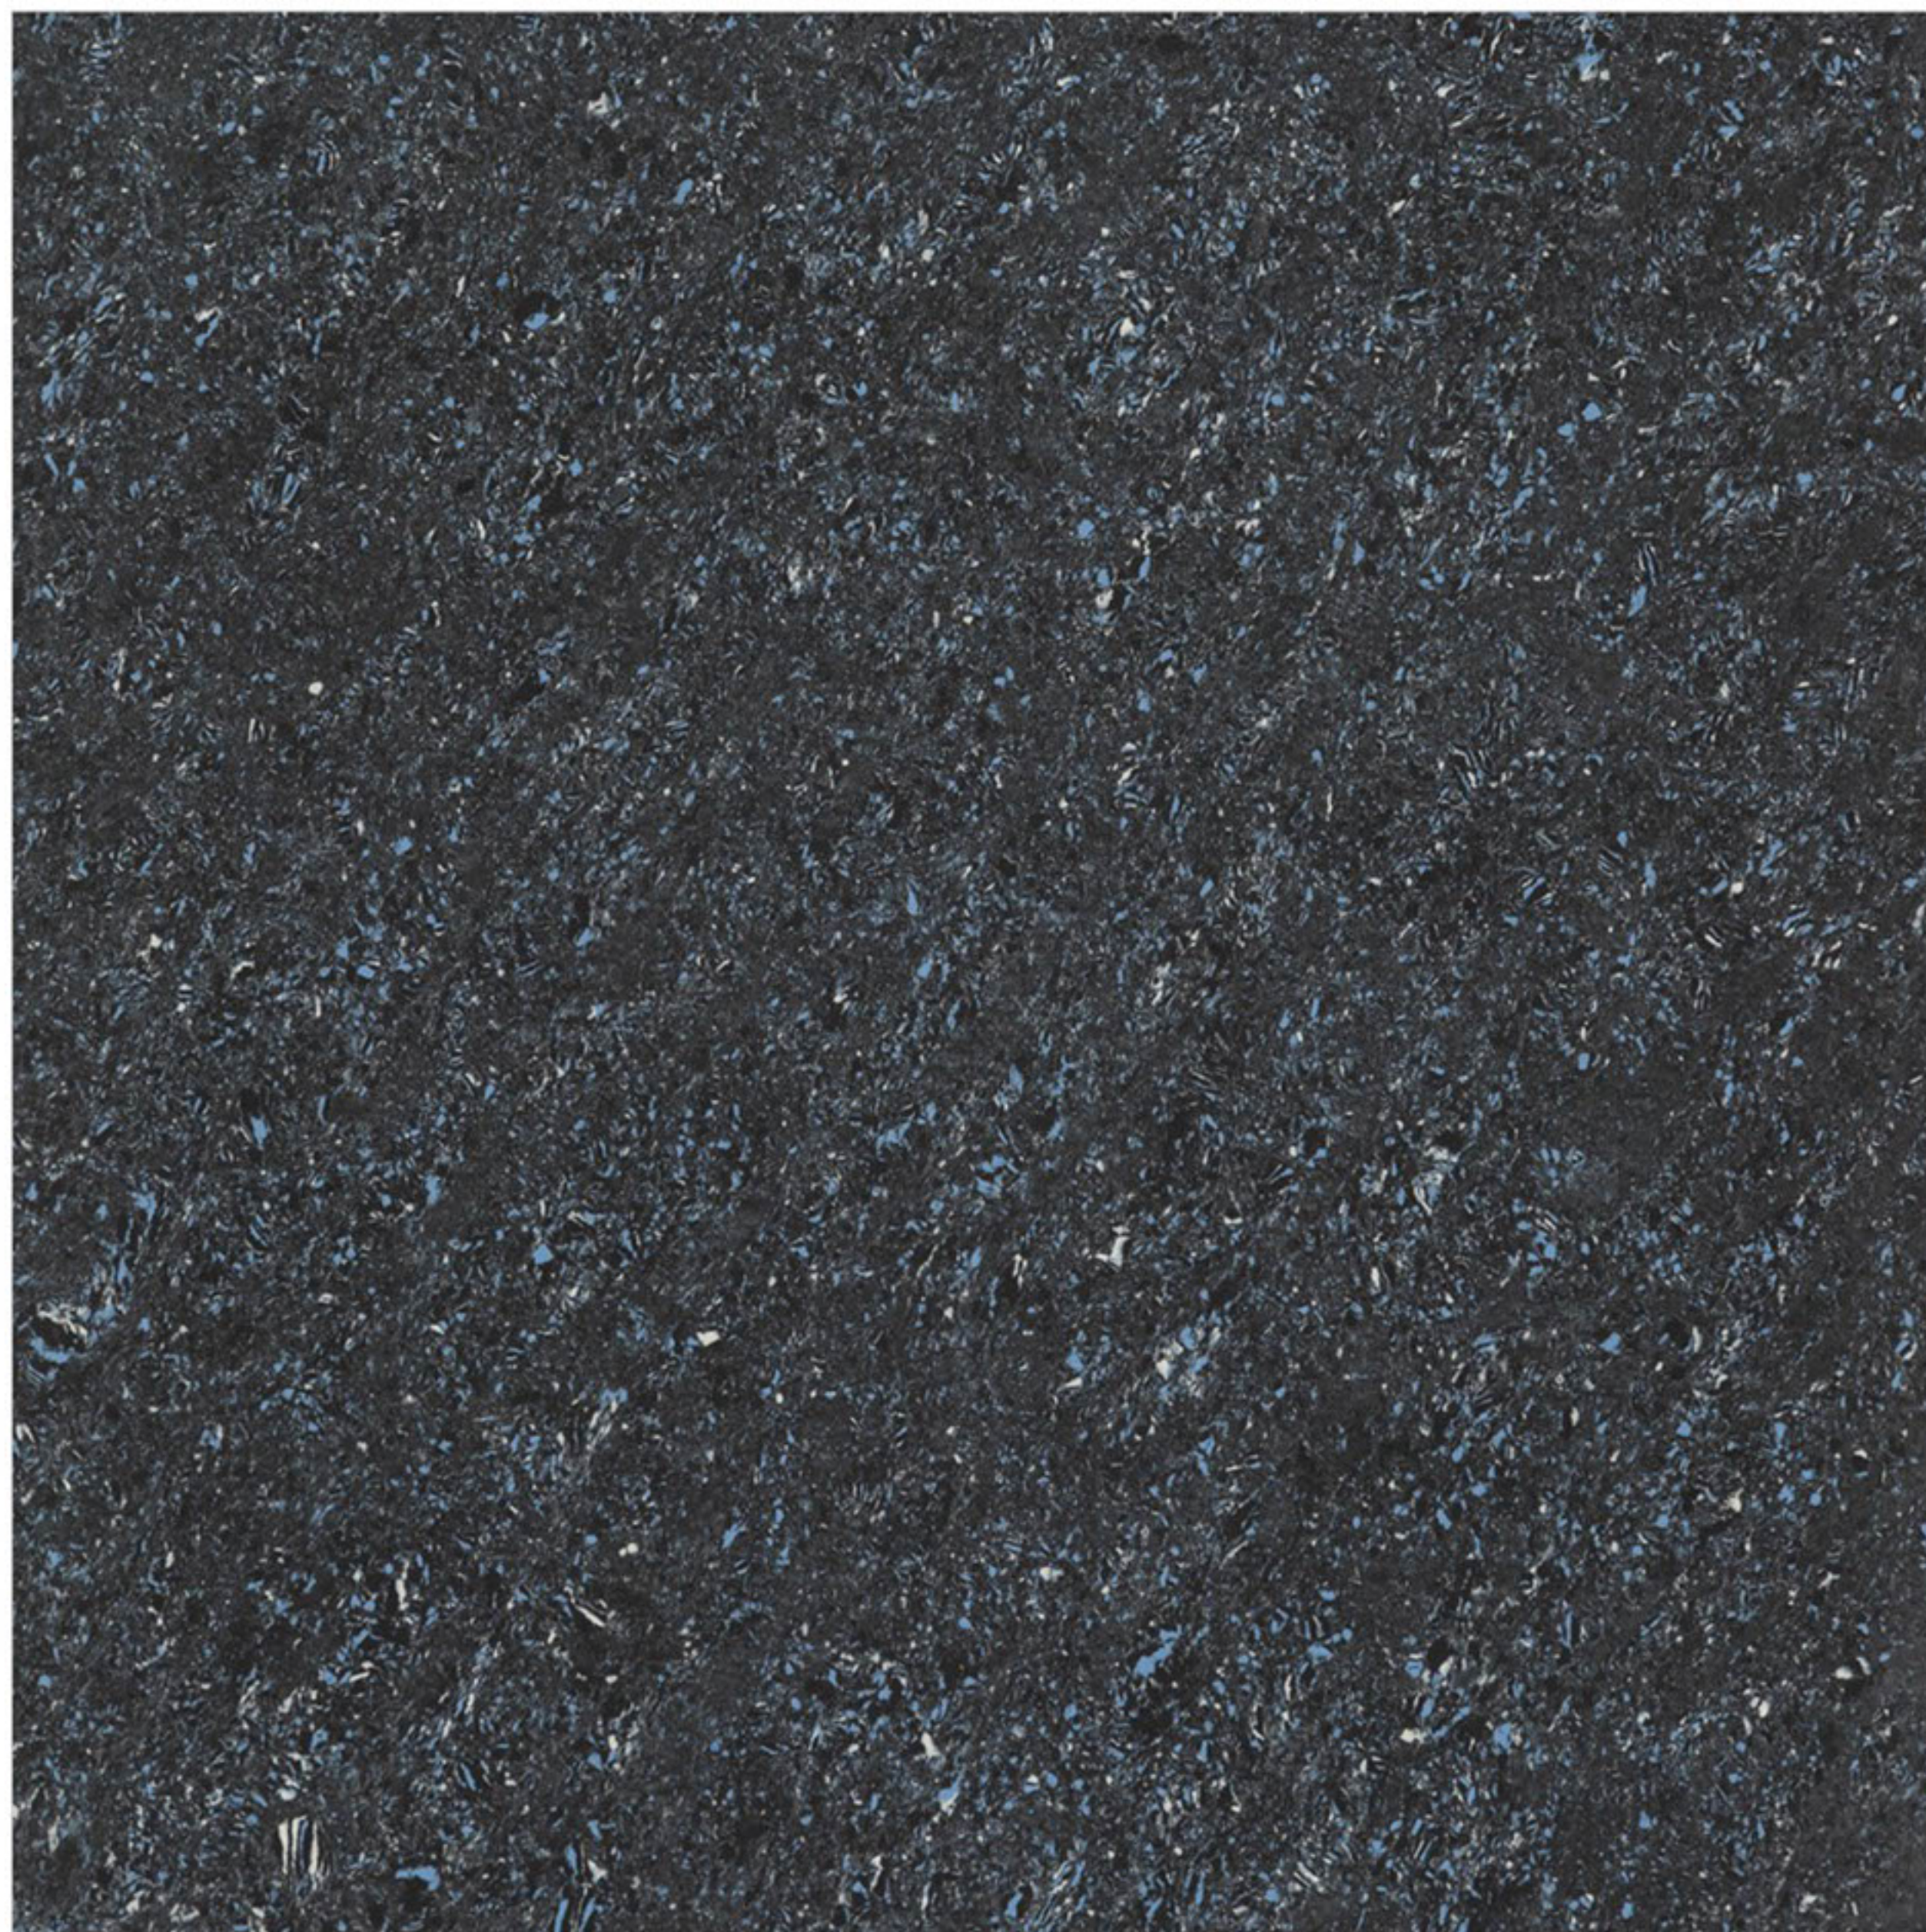


AQUA MAJESTIC



600x600

DOUBLE CHARGE
VITRIFIED TILES



PEARL WHITE



technical specification

TECHNICAL PARAMETERS	ASTM	CEN	ISO	INT. STD	VALUE
Deviation in length/width	C 499	EN 98	10545-2	± 0.6%	± 0.1%
Deviation in Thickness	C 499	EN 98	10545-2	± 0.5%	± 0.1%
Straightness of side	-	EN 98	10545-2	± 0.5%	± 0.1%
Rectangularity	-	EN 98	10545-2	± 0.6%	± 0.2%
Surface flatness	C 485	EN 98	10545-2	± 0.5%	± 0.2%
Water absorption	C 373	EN 99	10545-3	< 0.5%	< 0.05%
Scratch hardness (Moh` s)	C 849	EN 101	-	> 6	> 8
Modulus fo Rupture (N/mm ²)	C 648	EN 100	10545-4	> 27 N/mm ²	> 47 N/mm ²
Breaking Strength (N)	C 648	-	-	1113 N	2830 N
Skid Resistance	C 1028	-	DIN51130	> 0.4	> 0.6
Abrasion resistance (N/mm ³)	-	EN 102	10545-6	< 204 N/mm ²	< 144 N/mm ²
Linear thermal expansion (/ ^o C)	C 372	EN 103	10545-8	< 9x10 ⁻⁶ N/mm ²	< 6x10 ⁻⁶ N/mm ²
Thermal shock resistance	C 484	EN 104	10545-9	No Damage	No Damage
Colour resistance to light	DIN 51094	-	10545-16	No Damage	No Damage
Glossiness (Reflection)	-	-	-	-	90 %
Chemical resistance (Except HF)	C 650	EN 106	10545-13	No Damage	No Damage
Density (gm/cc)	-	-	DIN51082	> 2	2.4
Frost resistance	-	-	10545-12	Frost Proof	Frost Proof
Decorative Faults	-	-	10545-2	Defect Free	Defect Free
Surface Quality	-	-	10545-2	95 % Defect Free	> 95%
Impact Resistance	-	-	-	Good	Good
Crazing Resistance	-	-	10545-11	No Crazing	No Crazing
Resistance to house hold chemicals	-	-	10545-13	No visible effect	No visible effect

packing details

Size	Thickness	No.of Tiles / Box	Coverage Area	Wt. of Box
600x600mm	9.2mm	4 Pcs.	1.44 Sq.Mtr.	29.00 Kg. (Approx)

icon specifications:

Floor Tiles - Interior Use - Stain Resistant - Water Resistant - Micro Polished